



150/45 - Nw 5 - 135->145° 2 x 2000

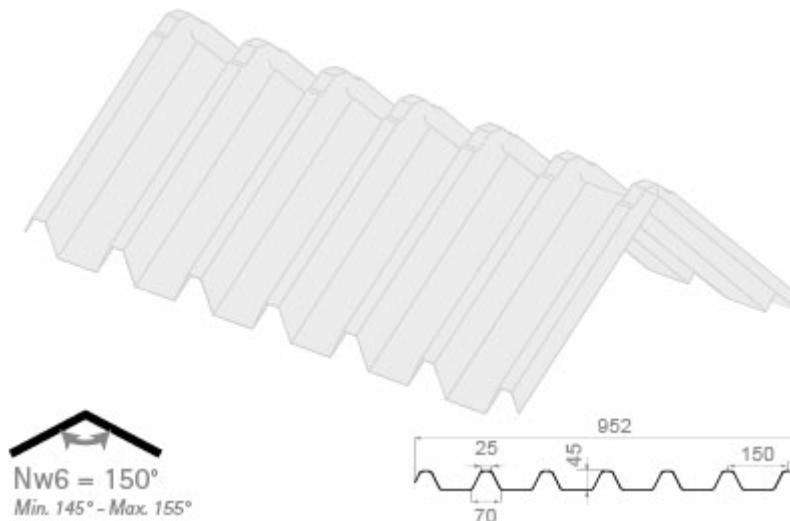

Position of center of gravity : na mm

Description	Colour	Width (mm)	References
150/45 - Nw 5 - 135->145°	 Translucide DIFFU 100	952	26579

The colour display on the screen does not give a faithful representation of the colours of the products.

Characteristics

	Units	Nominal value	Tolerance	
			Mini	Maxi
Weight	Kg/m ²	2.05	-0.05	+0.05
Thickness (according to standard EN-1013-3)	mm	1.1	-0.22	+0.22
Length (mm)	mm	-	-10	+10
Useful width	mm	870		
Total width	mm	952		
Squareness outside max. square (according to standard EN-1013-3)	mm	NA	-	-
Inertia for width of 1 m	Cm ⁴	NA	-	-
Minimum bend radius	m	NA	-	-
Nominal light transmission	% compared to air	57	-	-

Values applicable at an ambient temperature of 20°C

Some colours have been developed for specific projects. They are not stocked and are subject to minimum quantities. They may be subject to geographical limitations.