
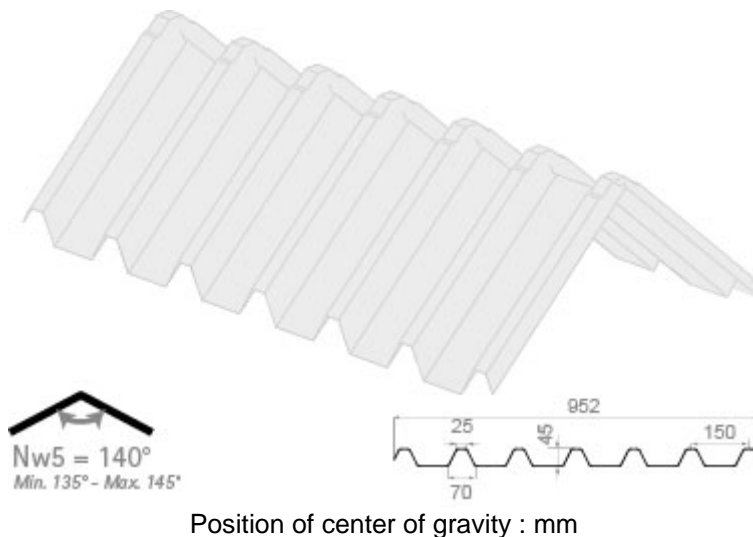


150/45 - Nw 5 - 135->145° 2 x 1700



| Description | Colour | Width (mm) | References |
|---------------------------|---|------------|------------|
| 150/45 - Nw 5 - 135->145° |  Translucide DIFFU 100 | 952 | 26580 |

The colour display on the screen does not give a faithful representation of the colours of the products.

Characteristics

| | Units | Nominal value | Tolerance | |
|--|-------------------|---------------|-----------|-------|
| | | | Mini | Maxi |
| Weight | Kg/m ² | 2.05 | -0.05 | +0.05 |
| Thickness (according to standard EN-1013-3) | mm | 1.1 | +0.22 | +0.22 |
| Length (mm) | mm | - | -10 | +10 |
| Useful width | mm | 870 | | |
| Total width | mm | 952 | | |
| Squareness outside max. square (according to standard EN-1013-3) | mm | NA | - | - |
| Inertia for width of 1 m | Cm ⁴ | NA | - | - |
| Minimum bend radius | m | NA | - | - |
| Nominal light transmission | % compared to air | 57 | - | - |

Values applicable at an ambient temperature of 20°C

Some colours have been developed for specific projects. They are not stocked and are subject to minimum quantities. They may be subject to geographical limitations.