


## 210/35

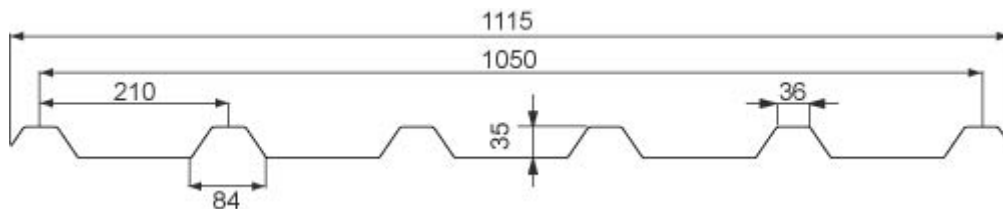

Position of center of gravity : NA mm

Description	Colour	Width (mm)	References
210/35	 Crystal	1115	52010

The colour display on the screen does not give a faithful representation of the colours of the products.

## Characteristics

	Units	Nominal value	Tolerance	
			Mini	Maxi
Weight	Kg/m <sup>2</sup>	1.6	-0.1	+0.05
Thickness (according to standard EN-1013-3)	mm	1	-0.2	+0.3
Length (mm)	mm	-	+2	+8
Useful width	mm	1050	-8	+8
Total width	mm	1115		
Squareness outside max. square (according to standard EN-1013-3)	mm	0.5	-	-
Inertia for width of 1 m	Cm <sup>4</sup>		-	-
Minimum bend radius	m		-	-
Nominal light transmission	% compared to air	79	-	-

Values applicable at an ambient temperature of 20°C

**Some colours have been developed for specific projects. They are not stocked and are subject to minimum quantities. They may be subject to geographical limitations.**

*The information contained in this Web site is provided in good faith, solely for purposes of information. It is based on the state of our*

*knowledge at the time of writing. This information cannot be considered as a suggestion to use our products in contradiction to existing patents, national or local laws or rules. The purchaser alone ensures that he will meet the duty to provide information and advice to the final user.*

*Possible non-compliance on the part of the purchaser with these rules, instructions and duties can under no circumstances engage our responsibility.*